


ECA 433MHz Coding Instructions

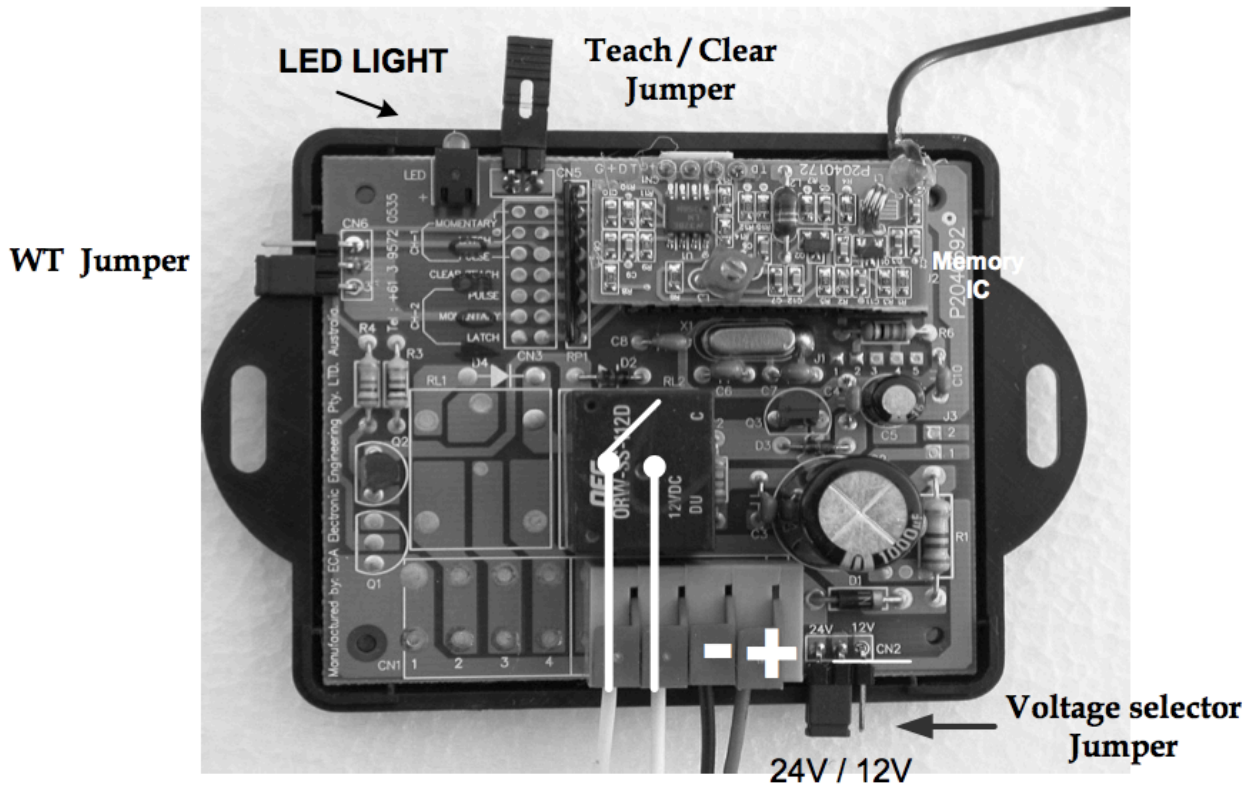

Programming a remote using an existing remote:

1. Take an existing working remote, and stand about 2m from your motor
2. Using your existing remote, press and hold both the buttons (III) and (I) simultaneously for 5 seconds
3. Release the buttons. The LED light on your motor's receiver will turn on, indicating that the receiver is ready to accept new remote controls
4. Using your new remote control, press any hold any button for 5 seconds, until the LED light on your motors receiver turns off. Indicating that your new remote has been accepted
5. At this stage, program any more new remotes by repeating step 4
6. Wait 20 seconds for your motor to exit programming mode

Programming a remote via your motor:

1. Remove the “clear” jumper on the receiver - the LED light will turn on
2. Using your new remote control, press any hold any button for 5 seconds, until the LED light on your motors receiver turns off. Indicating that your new remote has been accepted
3. Place the “Clear” jumper back on
4. Repeat steps 1-4 in order to program more remote controls

To delete all of the transmitters that has been coded into the motor:

1. Disconnect the power supply from the receiver and remove the “clear” Jumper in the receiver
2. Wait for 3 seconds and reconnect the power supply. The LED on the receiver will turn on
3. Before the LED light turns off, put back the “clear “ jumper
4. The LED will flash twice to indicate that all remote controls have been wiped from the receivers memory